

Cast Iron Pump 60Hz

Wastewater Pumps

Sewage / Non-Clogging Pump



ECT PUMP



SBAS



SBFS



SBCF

FEATURES

1. High Strength Stainless-steel made of shaft and impeller are installed.
2. High quality protector adopted on dry type motor to raising effective protection.
3. Cables base upgraded by filling EPOXY to raise humidity-resistance.
4. All products are made in Taiwan with high quality.

APPLICATIONS

- BCF / BFS series : Drain accumulated water and wastewater from husbandry, industry, basement, food factory...etc.
- BAS series : Water drainage for Civil engineering, Building, Engineering, Sewer, Agriculture, Fishery, Animal husbandry...etc.



**Impeller made of
stainless steel**

SUN PAN PACIFIC INDUSTRIAL CO., LTD.




ECT PUMP

SBAS series Wastewater Pump

SBAS



PERFORMANCE CURVE

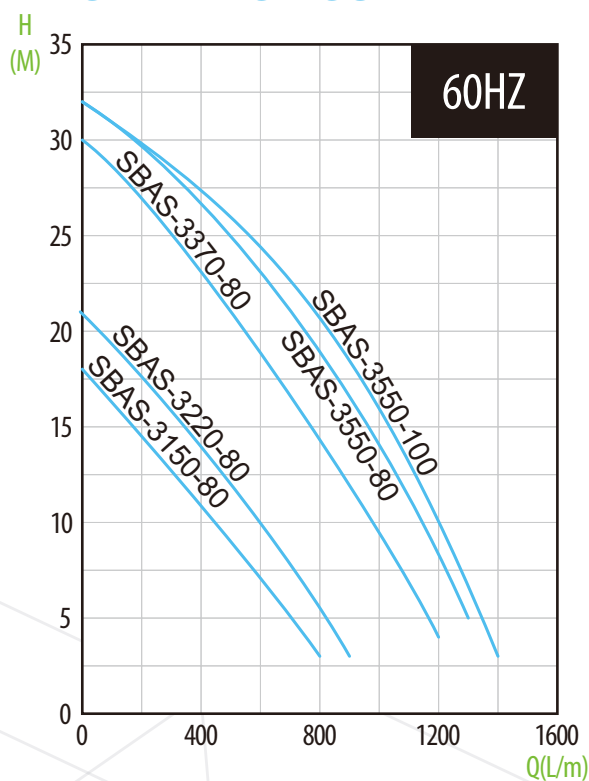

MATERIAL CONSTRUCTION

Item	Description	Structure	Materials
Pump	Impeller	-	Stainless Steel
	M. Seal	Double Mechanical Seal	SIC / SIC
	Bearing	Ball type bearing	-
	Shaft	-	SUS410
	Pump Housing	-	FC-20
Motor	Pole	2P	-
	Motor type	Dry Motor	-
	Hz / Ph	60Hz / 3Ø	-
	Protector	F class 150°C	-
	Voltage	200~460V	-
	Main Shaft	AC Protector	-
Liquid	Liquid temp	0~40°C	-
	Liquid nature	Sewage and Wastewater	-
	Max depth	30m	-

Special specifications will be accepted make-to-order

SPECIFICATION

Model	Power HP(kW)	Discharge Inch(mm)	Voltage V	Frequency Hz	Phase Ø	Pole P	Std. Head M	Std. Flow L/min	Solid Passage mm	Dimension (mm)			Weight KG
										L	W	H	
SBAS-3150-80	2 (1.5)	3" (80)	200~460	60	3	2	9	500	10	380	240	500	48
SBAS-3220-80	3 (2.2)	3" (80)	200~460	60	3	2	12	500	10	380	240	520	55
SBAS-3370-80	5 (3.7)	3" (80)	200~460	60	3	2	20	550	10	500	260	560	62
SBAS-3550-80	7½ (5.5)	3" (80)	200~460	60	3	2	25	500	10	500	260	590	67
SBAS-3550-100	7½ (5.5)	4" (100)	200~460	60	3	2	16	1000	10	500	260	590	67

SBFS series

Sewage / Non-Clogging Pump




ECT PUMP

SBFS



PERFORMANCE CURVE

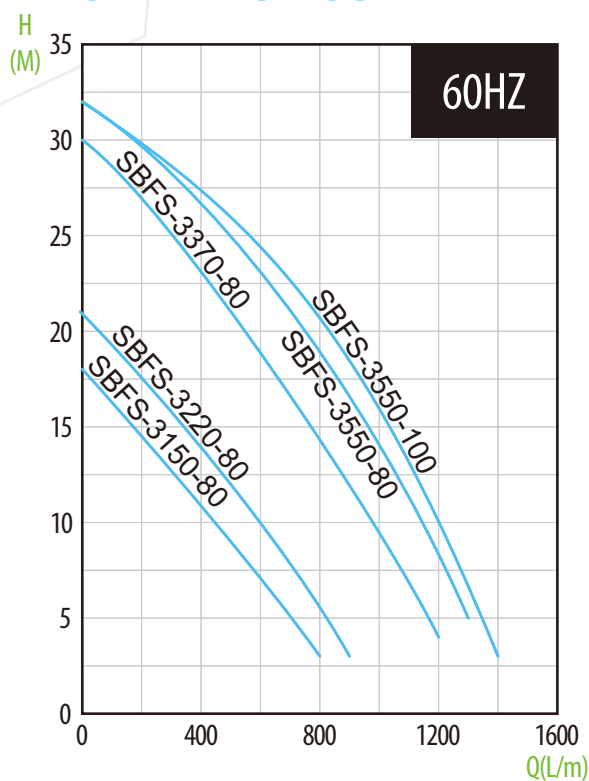

MATERIAL CONSTRUCTION

Item	Description	Structure	Materials
Pump	Impeller	-	Stainless Steel
	M. Seal	Double Mechanical Seal	SIC / SIC
	Bearing	Ball type bearing	-
	Shaft	-	SUS410
	Pump Housing	-	FC-20
Motor	Pole	2P	-
	Motor type	Dry Motor	-
	Hz / Ph	60Hz / 3Ø	-
	Protector	F class 150°C	-
	Voltage	200~460V	-
	Main Shaft	AC Protector	-
Liquid	Liquid temp	0~40°C	-
	Liquid nature	Sewage and Wastewater	-
	Max depth	30m	-

Special specifications will be accepted make-to-order

SPECIFICATION

Model	Power HP(kW)	Discharge Inch(mm)	Voltage V	Frequency Hz	Phase Ø	Pole P	Std. Head M	Std. Flow L/min	Solid Passage mm	Dimension (mm)			Weight KG
										L	W	H	
SBFS-3150-80	2 (1.5)	3" (80)	200~460	60	3	2	9	500	10	380	240	500	48
SBFS-3220-80	3 (2.2)	3" (80)	200~460	60	3	2	12	500	10	380	240	520	55
SBFS-3370-80	5 (3.7)	3" (80)	200~460	60	3	2	20	550	10	500	260	560	62
SBFS-3550-80	7½ (5.5)	3" (80)	200~460	60	3	2	25	500	10	500	260	590	67
SBFS-3550-100	7½ (5.5)	4" (100)	200~460	60	3	2	16	1000	10	500	260	590	67




ECT PUMP

SBCF series Sewage / Non-Clogging Pump

SBCF



PERFORMANCE CURVE

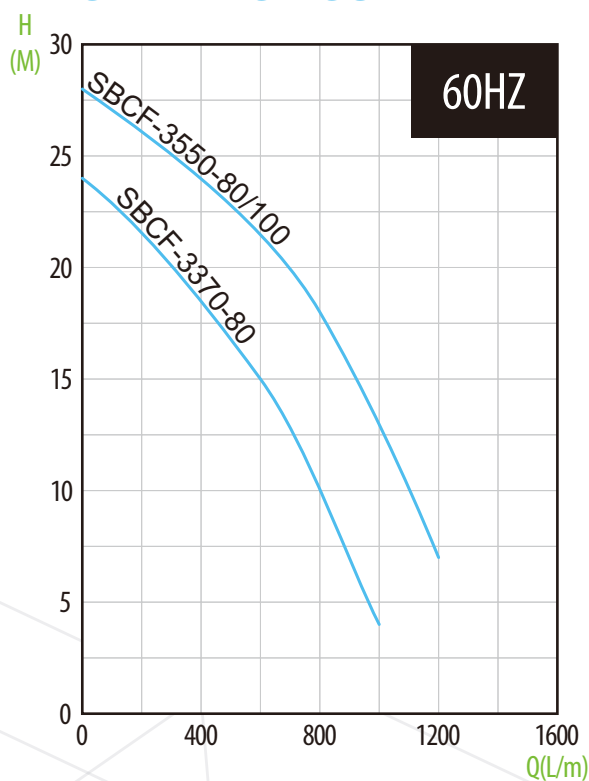

MATERIAL CONSTRUCTION

Item	Description	Structure	Materials
Pump	Impeller	-	Stainless Steel
	M. Seal	Double Mechanical Seal	SIC / SIC
	Bearing	Ball type bearing	-
	Shaft	-	SUS410
	Pump Housing	-	FC-20
Motor	Pole	2P	-
	Motor type	Dry Motor	-
	Hz / Ph	60Hz / 3Ø	-
	Protector	F class 150°C	-
	Voltage	200~460V	-
	Main Shaft	AC Protector	-
Liquid	Liquid temp	0~40°C	-
	Liquid nature	Sewage and Wastewater	-
	Max depth	30m	-

Special specifications will be accepted make-to-order

SPECIFICATION

Model	Power HP(kW)	Discharge Inch(mm)	Voltage V	Frequency Hz	Phase Ø	Pole P	Std. Head M	Std. Flow L/min	Solid Passage mm	Dimension (mm)			Weight KG
										L	W	H	
SBCF-3370-80	5 (3.7)	3" (80)	200~460	60	3	2	15	600	60	500	260	550	62
SBCF-3550-80/100	7½ (5.5)	3"-4" (80-100)	200~460	60	3	2	18	800	65	500	260	580	67